


FLEXSHADE® Tetra™


- Features:**
- Fire Rated PVC with PVDF Top Finish.
 - Zinc & Powder Coated Steelwork.
 - Stainless Steel Cables & Fittings.
 - Minimal Footings for Area Covered.
 - Designed to ASCE7 and AS1170 Code and to comply with other codes worldwide for 160km/hr (100mph) wind speed.

Tetra™ Series

Curved Edge T*16, T*25

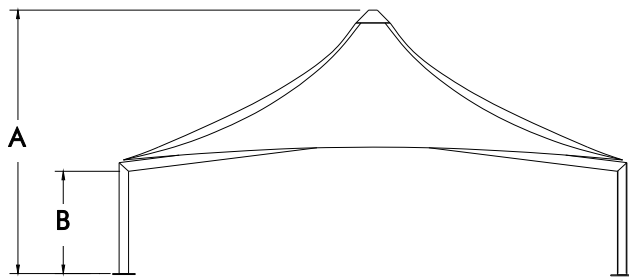

✕ T*25 shown to Scale

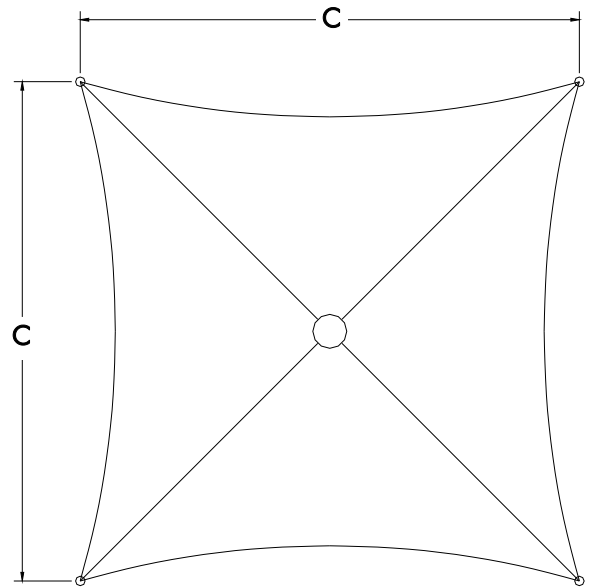

TYPE	*A	*B	*C
T*16	3994 mm 13' 1"	2400 mm 7' 10"	5000 mm 16' 5"
T*25	5175 mm 16' 11"	2500 mm 8' 2"	8815 mm 28' 11"



Flexshade® Tetra™ can be designed to suit specific customer requirements for height and plan dimension.



An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836
Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 **Fax: (07) 3265 4946**
Email: sales@flexshade.com **Web: www.flexshade.com**



Technical Specifications Tetra™ Range


TETRA CURVED EDGE- T*16, T*25

Wind Rating : 45m/sec (100mph)
W45 to AS1170.2
Exposure B to ASCE 7

Point Load : 1kN (225lbf) at Corner


Snow Load : 0.95 kPa (20 psf)
Ground Snow Load

Plan Areas : T*16 - 22 sq.m (242 sq.ft)
T*25 - 63 sq.m (677 sq.ft)

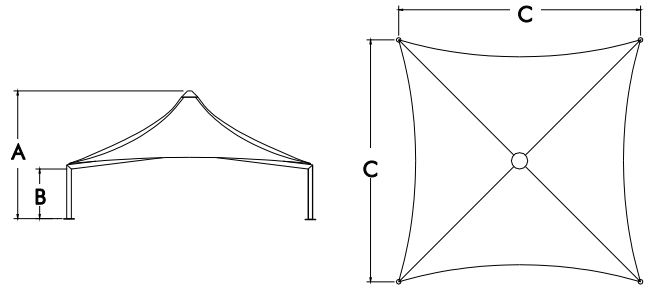

TYPE	A	B	C
T*16	3994 mm 13' 1"	2400 mm 7' 10"	5000 mm 16' 5"
T*25	5175 mm 16' 11"	2500 mm 8' 2"	8815 mm 28' 11"

✕ T*25 shown to Scale

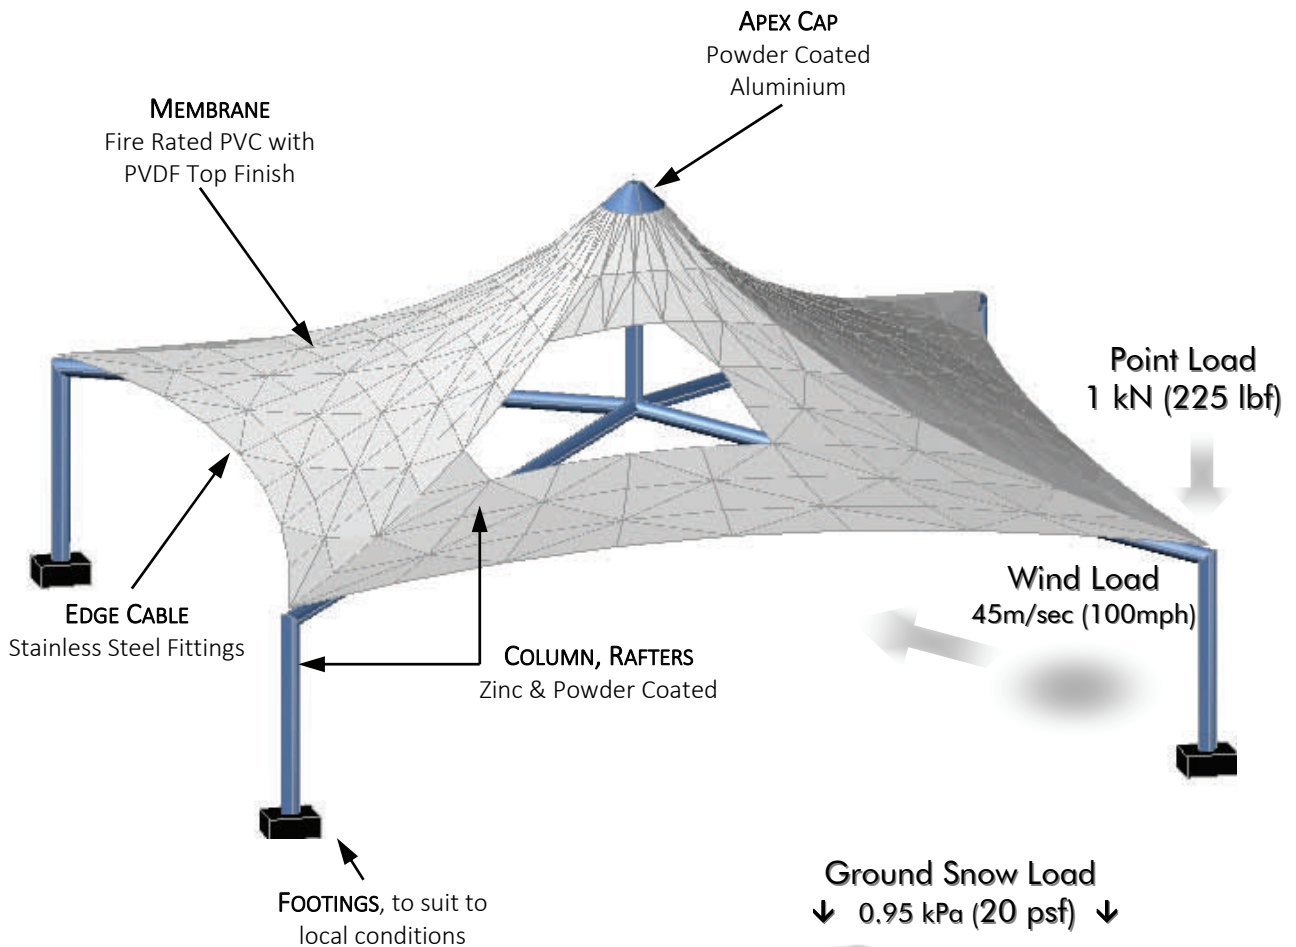

Flexshade® Tetra™ can be designed to suit specific customer requirements for height and plan dimension.
Standard specifications may change without notice.